



State of Utah

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

Department of Administrative Services

RICHARD K. ELLIS
Executive Director

Division of Facilities Construction and Management

F. KEITH STEPAN
Director

ADDENDUM # 2

Date: 07-17-2006

To: Contractors

From: Vic Middleton, Project Manager, DFCM

Reference: Security Fencing – Olympus and Timpanagos Facility
Draper Prison – Department of Corrections
DFCM Project No. 05082100

Subject: **Addendum No. 2**

Pages:	Addendum Cover	1 Page
	<u>Answers to Questions and Drawing Modifications</u>	<u>2 Pages</u>
		3 Pages

Note: This Addendum shall be included as part of the Contract Documents. Items in this Addendum apply to all drawings and specification sections whether referenced or not involving the portion of the work added, deleted, modified, or otherwise addressed in the Addendum. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

1.1 See Attached pages.

End of Addendum

Addendum No. 2

1. **Question:** Can we excavate the trench 36"x8" and form just the top 4" for a level surface.

Answer: It will be acceptable to excavate the trench 36"x8" and utilize the existing soil as the form as long as the excavation is controlled, the trench is neat, and the side slopes of the trench do not cave. The top portion which is exposed shall be formed by the Contractor.

2. **Question:** The drawings indicate that the fence post footings are to be 14" in diameter, but they are set in a grade beam that is only 8" wide. This would make a continuous grade beam impossible, as it would need to be terminated and expansion joints installed every ten feet as a fence post is encountered. Please clarify.

Answer: The grade beam shall be continuous between fence posts.

3. **Question:** Drawing D02 (sheet 8 of 8) has a very clear detail for the steel frame work required for magnates. However, there is no detail of the gate itself. Is the intent to put a chain link gate in the framework shown, or some other type of door? If it is to be a chain link gate we will need a detail of the gate construction, especially the hinge design and locking mechanisms.


Answer: For the man gates, the Owner will supply the gate and the contractor shall install the gate in the steel frame work. The 12' single swing gates will not be installed in steel frame work and shall be supplied and installed by the Contractor.

4. **Question:** Is there a location on the Department of Corrections grounds that can be utilized to dispose of sod, asphalt, concrete, etc.


Answer: All waste material and clear and grub material cannot be disposed of on the Department of Corrections grounds. All waste material shall be properly disposed of off-site at a location to be determined by the Contractor.

5. **Drawings:** Add 12' wide swing gates to drawings CS01 and CS02 according to the attached Figure 1.

CS01 (PARTIAL)

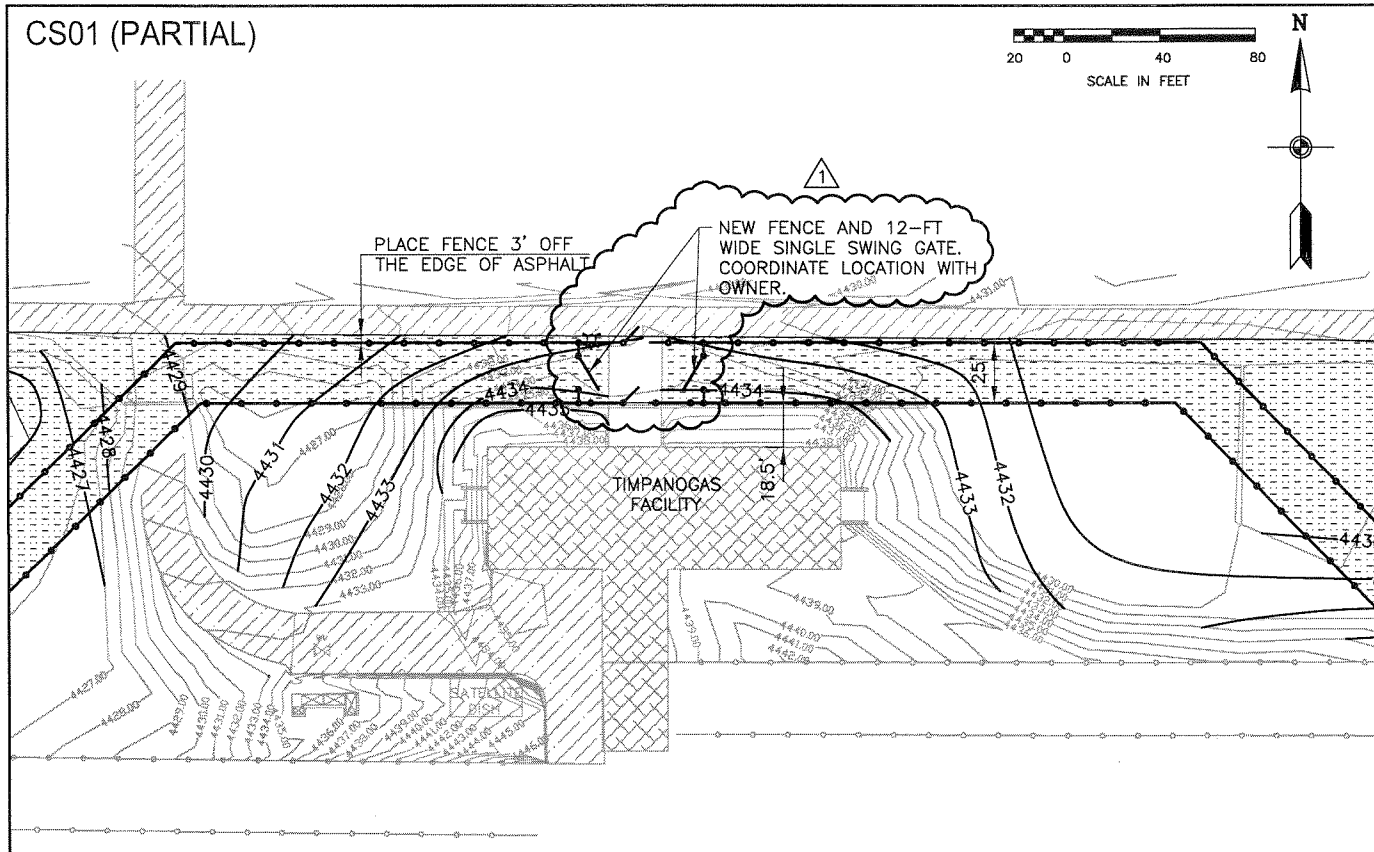

CS02 (PARTIAL)

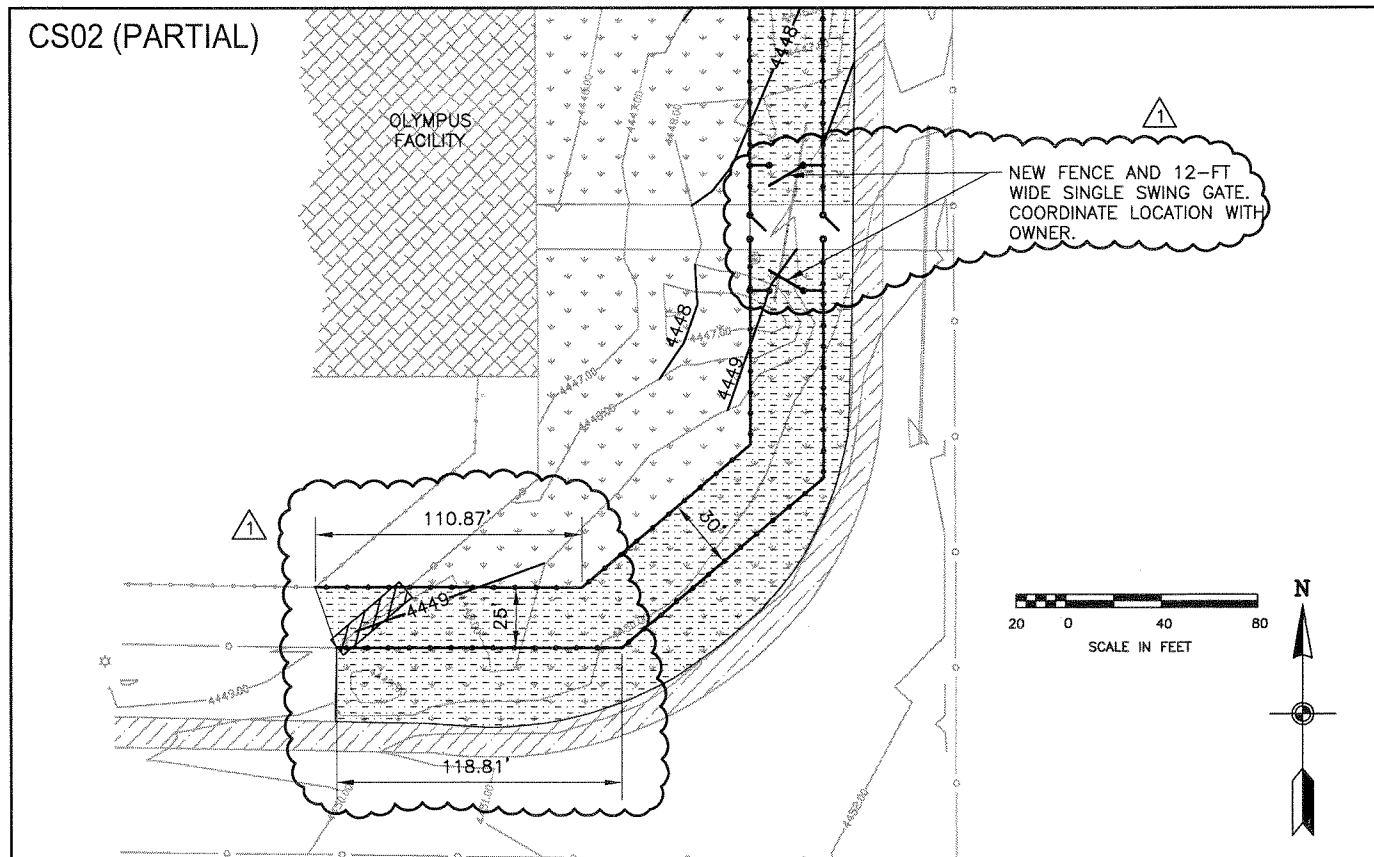

△ SWING GATES, AND DIMENSION UPDATES

Figure 1
ADDENDUM NO. 2

Timpanogos and Olympus Facility Security Fencing Upgrade
State of Utah Division of Facilities Construction & Management

